


Specification

UNI-PEX

DYNAMIC MICROPHONE

MD-23S

IMPEDANCE	600Ω Unbalanced
SENSITIVITY	-55dB (at 1kHz, 0dB=1V/Pa=0.1V/μ bar)
FREQUENCY RESPONSE	200Hz~4kHz (at 1kHz, Deviation within +8dB -24dB)
DIRECTIVITY	Unidirectional
FINISH	(ABS Resin): Dark-Gray (Munsell 7.5PB1.5/2 approx.)
DIMENSIONS	64 (W) × 90 (L) × 46 (D) mm
MASS	Approx. 190g
ADDITIONAL FEATURE	Built-in on/off talk switch, Curled cable with phone plug (Extended length 1000mm)
ACCESSORY	Microphone Hanger × 1
APPLICABLE STANDARD	JIS C 5502 Microphone

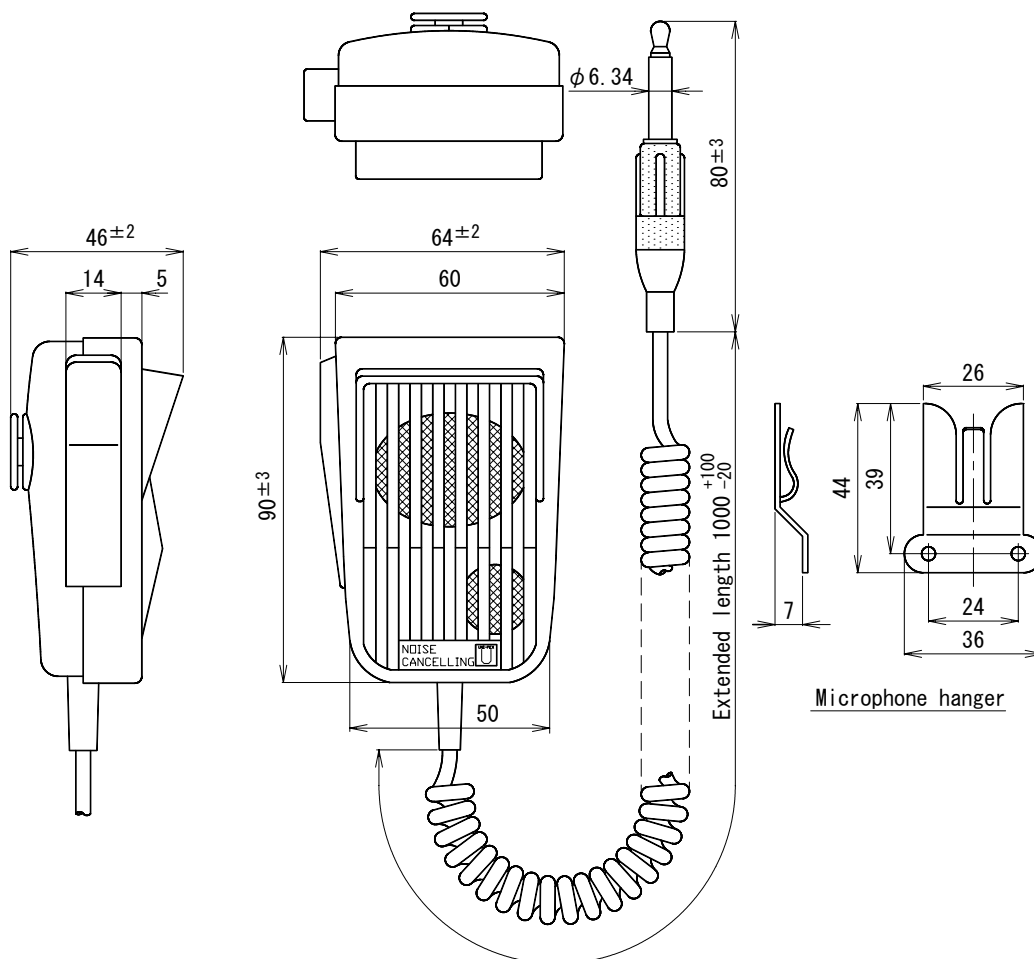

UNIT: mm

BUSINESS

JD01

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社