

# ACT-7H Handheld Transmitter

## Key Features

- Rugged, ergonomically designed magnesium alloy housing.
- Standard cardioid condenser microphone capsule provides high fidelity, wide frequency response, high dynamic range, rapid transient response, clarity and accurate sound reproduction.
- ACT™ syncs the transmitter and receiver frequency automatically.
- Extremely low handling noise.
- Hardened steel grille resists wear and abuse.
- Built-in foam reduces pop, breath and wind noise.
- Pilotone squelch for interference-free operation.
- Silent on/off switch.
- 4-segment battery status meter.
- LCD displays group, channel & error message code.
- 20-hour battery life per 2 'AA' alkaline batteries.
- 100m (330ft.) operating range.
- 100% made in Taiwan.

## Microphone Capsules


<b>MU-39</b>	Supercardioid Dynamic Capsule
<b>MU-59</b>	Supercardioid Dynamic Capsule
<b>MU-70</b>	Supercardioid Condenser Capsule
<b>MU-80</b>	Supercardioid Condenser Capsule
<b>MU-90</b>	Supercardioid Condenser Capsule

## Accessories

<b>MS-20</b>	Desktop Microphone Tripod
<b>MD-20</b>	Handheld Transmitter Microphone Holder
<b>RH-77M</b>	Multi-colored ID Rings
<b>SW-20</b>	Multi-colored Foam Windscreens
<b>TC-18</b>	Transmitter Shielding Case

## Technical Specifications

Oscillation Mode	PLL Synthesized
Frequency Range	UHF 480 – 934 MHz
Bandwidth	24 MHz
Channel Set-Up	ACT Sync
RF Output Power	10 – 30 mW (country dependent)
Spurious Emissions	< -55 dBc
Max. Input Level	140 dB SPL
Battery	2 AA alkaline
Dimensions	50(Ø) × 262(L) mm   2.0(Ø) × 10.3(L) "
Weight	Approx. 260g   9.2oz (excluding batteries)

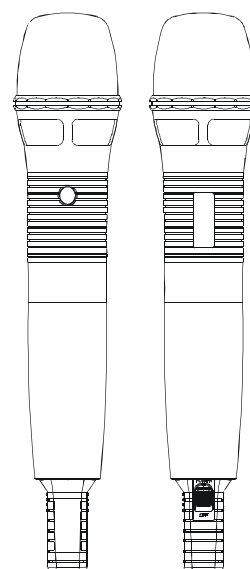

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan  
Tel: +886.5.238.0809 | Fax: +886.5.238.0803  
www.mipro.com.tw | mipro@mipro.com.tw

Specifications subject to change without notice. SS015/06