


# WIRELESS LECTERN SYSTEM

## CSV-540R

- RMS 40W amplifier built in
- With 3 wide-band speakers built in
- Built-in gooseneck microphone
- Handheld wireless microphone
- MP3 module with USB / SD / MMC interface + "RECORDING" function
- Voice priority function

**UHF RANGE**  
SUT-801

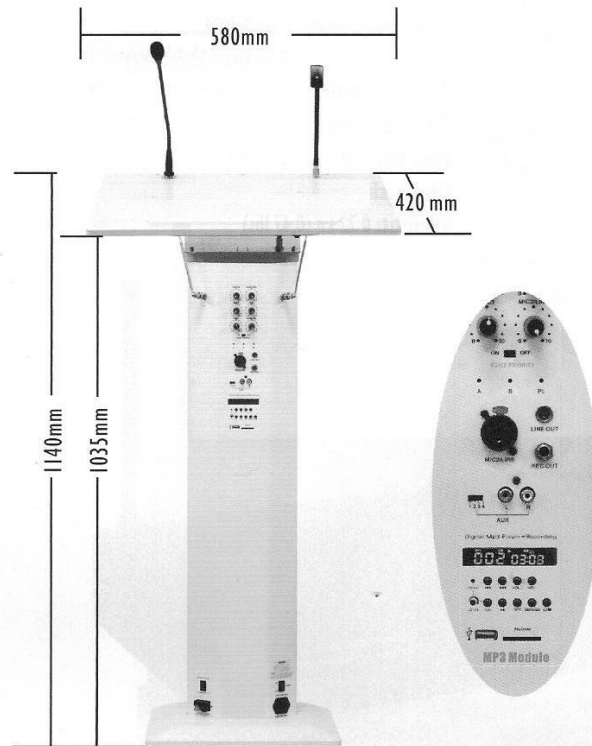

<b>MODEL</b>	<b>CSV-540R</b>
<b>Power supply</b>	RMS 40W
<b>MP3 module</b>	MP3 Player and recording function
<b>Power consumption</b>	90W
<b>T.H.D.</b>	<0.5% (at AUX 1W)
<b>S/N ratio</b>	>45dB
<b>Input sensibility</b>	MIC 1: $\geq -50\text{dBV} \pm 2\text{dB} / 680 \Omega$ ; MIC2: $-55\text{dBV} \pm 2\text{dB} / 680 \Omega$ LINE: $-20\text{dBV} \pm 2\text{dB} / 50\text{K} \Omega$ ; AUX1: $-20\text{dBV} \pm 2\text{dB} / 10\text{K} \Omega$ ; AUX2: $-15\text{dBV} \pm 2\text{dB} / 30\text{K} \Omega$ ; AUX3: $-15\text{dBV} \pm 2\text{dB} / 30\text{K} \Omega$ ; AUX4: $-15\text{dBV} \pm 2\text{dB} / 30\text{K} \Omega$
<b>Wireless receiver module</b>	WTU-221 (Non-diversity)
<b>Frequency response</b>	100Hz-16KHz
<b>Receiving mode</b>	Quartz fixed frequency
<b>AC Power</b>	110~120V / 60Hz or 220~240V / 50Hz
<b>Channel</b>	1 -channel
<b>REC. Output</b>	1V / 0dB (at AUX -20dBV)
<b>Volume control</b>	BASS: $\pm 10\text{dB}$ / TREBLE: $\pm 10\text{dB}$
<b>Adjustment</b>	FM(3E)
<b>Receiving</b>	15-25m (Non-obstacle)
<b>Color</b>	WHITE
<b>Dimension (WxDxH)</b>	580 x 420 x 1140 mm (22.8" x 16.5" x 44.9")
<b>Weight (Approx.)</b>	17.2 kg (37.92 lbs)